


# Product Bulletin

## Integrating CANbus with TFT RC Monitors

The TFT CANbus adapter (YE-CAN2) enables TFT RC Monitors to be used on a vehicle's CANbus network. The YE-CAN2 module is installed inline with the monitor power and communication cable.

Does not require interface box	✓
Does not require opening monitor control box	✓
Can be used along with TFT wireless operator station	✓
Compact, easy to install	✓

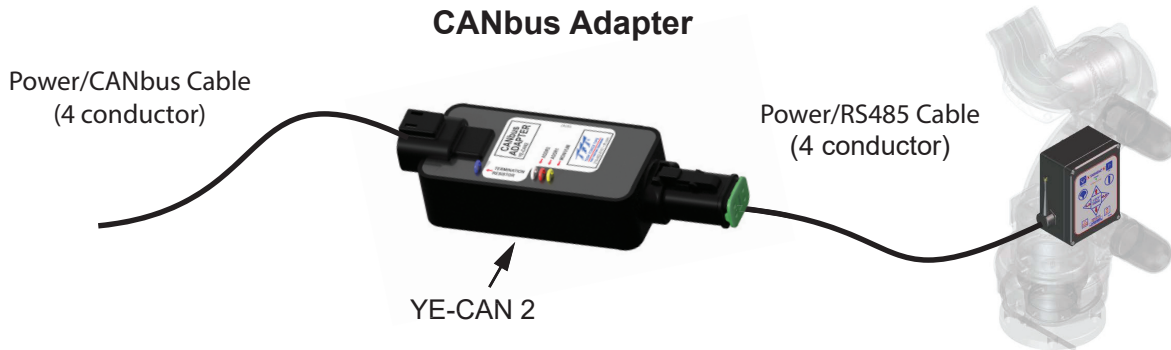


**1-4; CONFIGURATION JUMPERS;** determine desired address and jumper configuration for your vehicle. Verify your selection to avoid cutting the wrong jumpers. Cutting errors are not covered under warranty.

- 1. 120Ω Terminating Resistor Jumper  
- Cut blue wire to remove resistor

**2 and 3. Address Selection**

	Address	
	Monitor	VUM
No Wire Cut	47 (x2F)	37 (x25)
Cut red wire	48 (x30)	38 (x26)
Cut white wire	49 (x31)	39 (x27)
Cut red and white wires	50 (x32)	40 (x28)

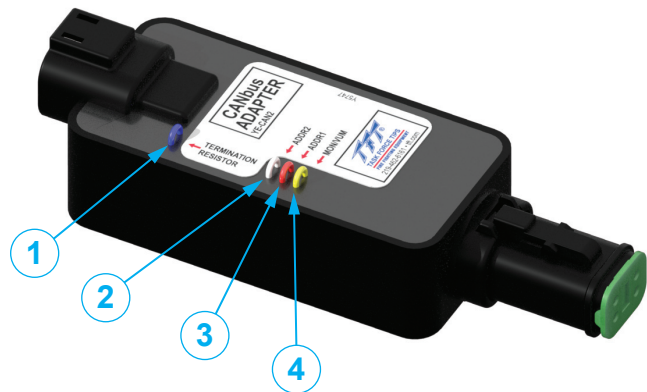

- 4. Application Jumper  
Select application from table below. Do not cut yellow wire if monitor is used.

Application	Yellow Wire
Monitor Only	Do Not Cut
Monitor & VUM	Do Not Cut
VUM Only	Cut Wire

**Note: After cutting wires, seal ends with RTV silicone or similar material.**