

Certificate of Conformance

to

EN15182-2 (2019) Handheld Branchpipes for Fire Service Use

Task Force Tips, LLC certifies that the following nozzles meet or exceed the requirements found in the EN15182-2 (2019) standard.

G-Force (GPJ**) Pn 16**



*For supporting documentation
contact us at tft.com*

TASK FORCE TIPS

Delivers what our customers need, when they need it.



**TASK FORCE TIPS LLC
REGISTERED TO ISO 9001:2015
FILE NUMBER 10001004 QM15**

Annex C (normative)

Datasheet for hand-held branchpipes for fire service use


C.1 General

- NOTE 1** The symbol * means “where applicable” in the whole datasheet
NOTE 2 Actual test results can be entered in the data sheet when these results exceed the minimum requirements given in this Standard

C.2 General data

1.1 Manufacturer	Task Force Tips, LLC., Valparaiso, IN
1.2 Type	G-Force (GP**J**) Pn 16
1.3 Type according to EN 15182-1 Annex A	Type 4.2
1.4 Flowrate (l/min) at p_R	0-500 l/min @ P_R 6 bar
1.5 Flow settings *	Pulsing 250, Auto 500
1.6 Type of spray *	Full cone

C.3 Flow pressure chart

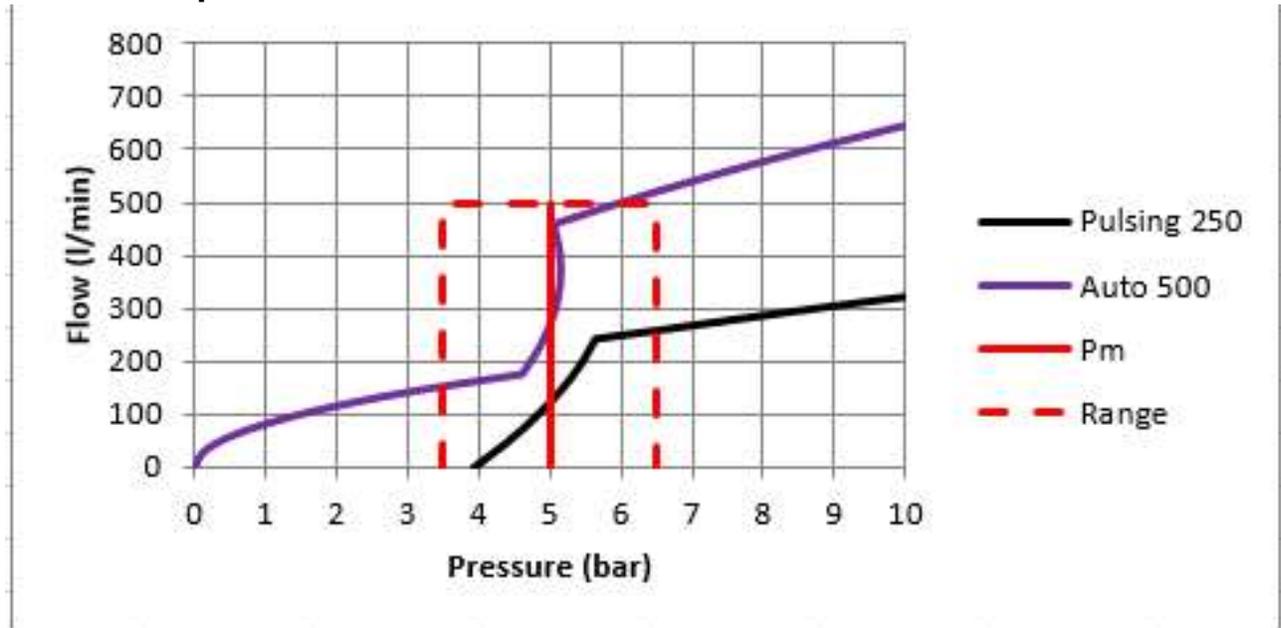

(l/min)	Reach (meters)		
	Straight	Narrow	Wide
250	34	13	6
500	41	17	9

C.4 Operational devices

3.1 Fitting system	Full time swivel
3.2 Gripping device	Pistol grip
3.3 Open/shut-off device *	Slide Valve
3.4 Jet/spray system *	Rotating
3.5 Flow adjustment system *	Rotating

C.5 Requirements

OPERATING AND HANDLING	Relevant sub clause number per standard	Item	Minimum Requirement	Test Result	
	EN15182-2/4.2.1	Dimensions (mm)	$\leq 450 \times 300 \times 150$	254x120x248	
		Mass (kg)	≤ 3.5	2.0	
	Torques needed for moving operating elements (N·m)				
	EN15182-2/4.2.2	Valve Handle (Bale)	≤ 15	4.1	
		Open Valve with Trigger	≤ 15	3.38	
		Engage Trigger Lock	≤ 15	0.113	
		Disengage Trigger Lock	≤ 15	3.12	
		Flow adjustment element	≤ 15	5.6	
		Jet adjustment element	≤ 10	1.0	
Flow adjustment *					
EN15182-2/4.2.3	Rotation from minimal to maximal flow	$\leq 180^\circ$	156°		
Jet adjustment *					
EN15182-2/4.2.4	Rotation from straight jet to wide spray jet with a minimal spray angle of 100°	70° - 180°	160°		

PERFORMANCE	Relevant sub clause number per standard	Item	Minimum Requirement	Test Result	
	EN15182-2/4.3.3	Effective throw (m)	35	41	
	Spray jet *				
	EN15182-2/4.3.4	Wide spray jet *: angle	$\geq 100^\circ$	PASS	
	EN15182-2/4.3.5	Narrow spray jet *: angle	$\leq 30^\circ$	PASS	

	Relevant sub clause number per standard	Item	Minimum Requirement	Test Result
PHYSICS	EN15182-1/6.5.3	Sensitivity to frost (° C)	Operational after 30 min @ (-15±2)°C	PASS
	EN15182-1/6.5.2	Sensitivity to heat (° C)	Operational after 24 h @ (55±2)°C	PASS
	EN15182-1/6.4	Non-obstruction test (mm)	4,76	PASS
	EN15182-2/4.5	Burst pressure (bar)	≥ 60 bar	PASS

C.6 Operational extra data (no requirements)

Relevant sub clause number per standard	Item	Test Result
Ageing tests		
	UV test	
	Ozone test	
	Corrosion test	HARDCOAT EXCEED MILITARY SPECIFICATION MILA-8625F

C.7 Data certified by *:

Alan J. Painter
Compliance Manager
Task Force Tips LLC