

# TORNADO® MONITOR

## 500 GPM, MANUAL AND RC

Tornado RC Y2-E64A



The TORNADO® monitor series is available in a manual or RC version. Models are compact, yet capable of flowing up to 500 gpm (1900 l/min). They are an ideal bumper turret and have a 370° horizontal rotational or 180° with user installed travel-limit stops. The elevation range is 90° above horizontal to 45° below. Discharge elbows include an integrated stream straightener. An RC LT version is also available for lower profile applications.

### Rugged Durability



Tornado RC

The Tornado is hard coat anodized and silver powder coat finished for maximum protection. In addition, the electric motors and electrical enclosure box are water and dust-proof for rugged fire service use.

### Easy Installation



Simple electrical connection

Waterproof plugs throughout make connections quick and secure. Quick connect inlets allow for easy removal if necessary to tilt the cab of the truck.

### A Variety of Options




Wireless Operator  
YE-RF-900-D

RC versions have a wide range of fixed and portable controller choices and several joystick control options.



Joystick Monitor  
Operator Station  
Y4E-JS-GT

# NOZZLE OPTIONS FOR THE TORNADO MONITOR

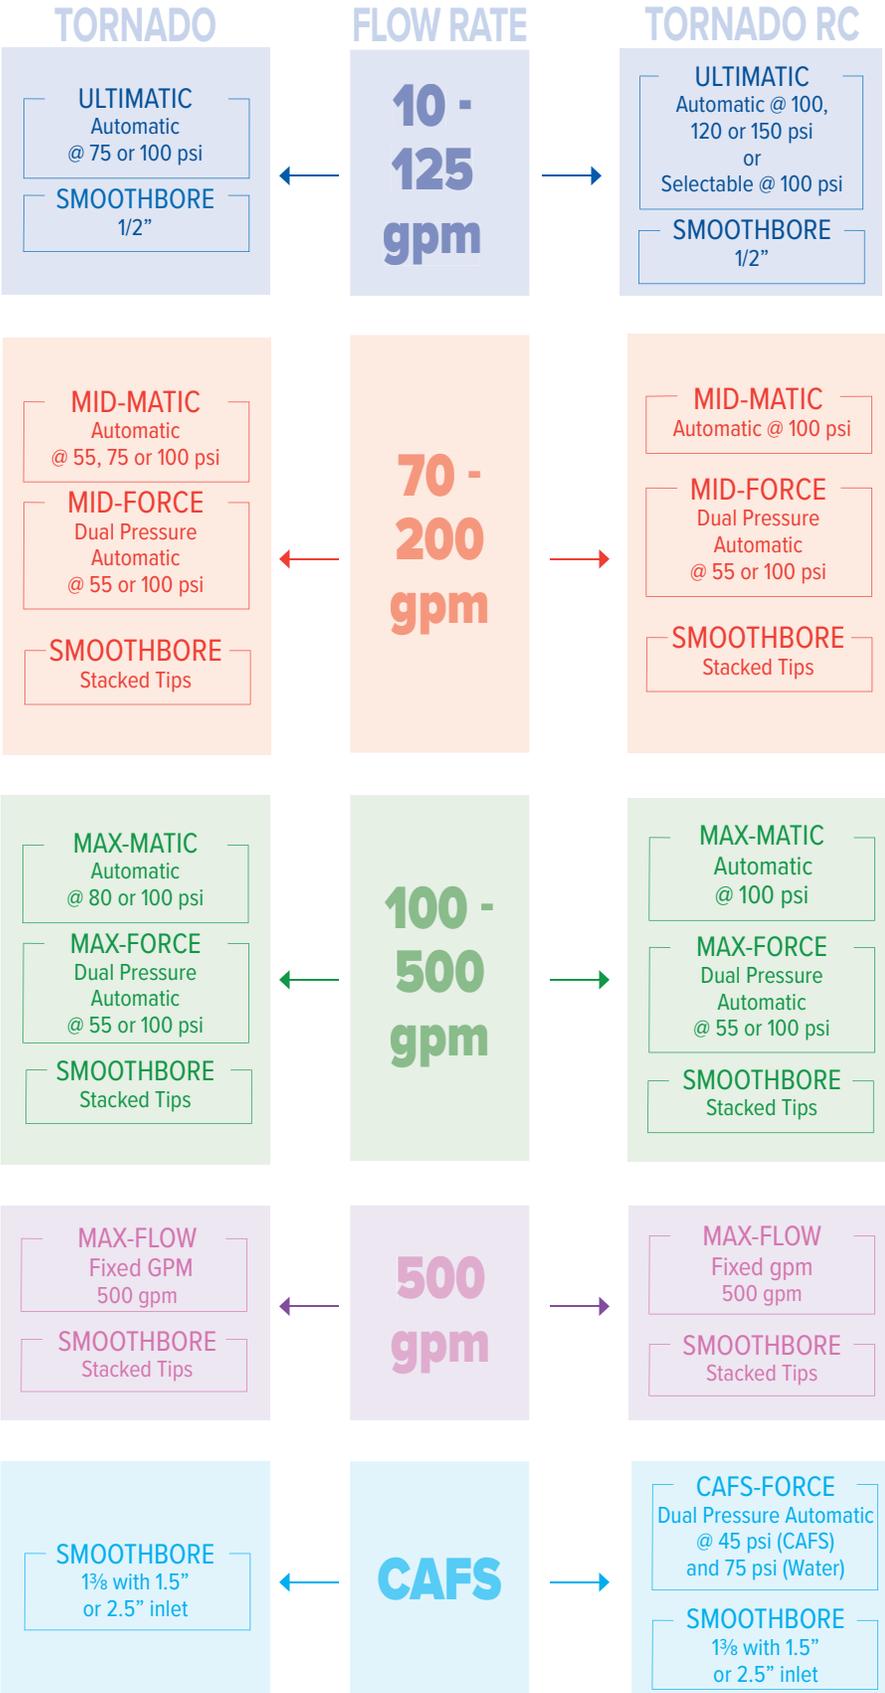

## RC CONTROLLER OPTIONS

**BLUETOOTH®**

YE-RF-BT Tactile Touch Screen Controller



Bluetooth

YE-BT-1 Bluetooth® Adapter



**PUMP PANEL**

Y4E-RP-D Panel Mount Monitor Display



**HANDHELD W/30 FT TETHER**

Y4E-CT-30-D Tethered Monitor Operator Station with Display



**WIRELESS HANDHELD**

YE-RF-900-D Wireless Monitor Operator Station with Display



**JOYSTICK IN THE CAB**



Joystick monitor operator station with valve control. Available in a gateable (Y4E-JS-GT) or non-gateable version (Y4E-JS-52)



Heavy Duty 2" Water Valve and Interface Box: gateable version (YE-VKG-PH) or non-gateable version (YE-VK-PH)